



SSP Fittings Corp.
 8250 Boyle Parkway
 Twinsburg, OH 44087-2200
 U.S.A.
Phone: 330-425-4250
E-mail: customer.inquiries@mysspusa.com

Poppet Check Valves - Fixed Cracking Pressure


CP Series poppet check valves offer a wide variety of cracking pressures and for medium-pressure, high-cycle process and instrumentation applications.

Specifications

- Pressure: Up to 3000 psig (206 bar)
- Temperature: -10 to 375° F (-23 to 190° C)
- Flow Coefficient: up to 1.20
- Body Materials: 316 SS and Brass
- Seat Materials FKM, NBR
- Cracking Pressures: More than 20 cracking pressure from 1/3 to 100 psig (0.023 to 6.89 bar)
- End Connections: MNPT, FNPT, Male and Female BSPT





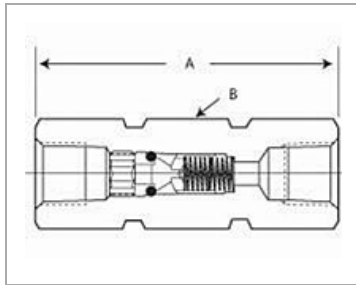













Our website

[+ more](#)



1 2 3 4 5 »

Part #	Body Material	Connection 1 - Type	Connection 1 - Size	Connection 2 - Type	Connection 2 - Size	Cv	O-ring Material	Cracking Pressure	Temperature	CAD	List Price
4CP4FRT-10-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	10 psig	850 °F 454 °C		-
4CP4FRT-1-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	1 psig	850 °F 454 °C		-
4CP4FRT-1/3-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	1/3 psig	850 °F 454 °C		-
4CP4FRT-5-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	5 psig	850 °F 454 °C		-
4CP4FRT-100-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	100 psig	850 °F 454 °C		-
4CP4FRT-15-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	15 psig	850 °F 454 °C		-
4CP4FRT-90-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	90 psig	850 °F 454 °C		-

Part #	Body Material	Connection 1 - Type	Connection 1 - Size	Connection 2 - Type	Connection 2 - Size	Cv	O-ring Material	Cracking Pressure	Temperature	CAD	List Price
4CP4FRT-20-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	20 psig	850 °F 454 °C		-
4CP4FRT-85-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	85 psig	850 °F 454 °C		-
4CP4FRT-25-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	25 psig	850 °F 454 °C		-
4CP4FRT-80-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	80 psig	850 °F 454 °C		-
4CP4FRT-30-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	30 psig	850 °F 454 °C		-
4CP4FRT-75-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	75 psig	850 °F 454 °C		-
4CP4FRT-35-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	35 psig	850 °F 454 °C		-
4CP4FRT-65-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	65 psig	850 °F 454 °C		-
4CP4FRT-60-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	60 psig	850 °F 454 °C		-
4CP4FRT-55-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	55 psig	850 °F 454 °C		-
4CP4FRT-50-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	50 psig	850 °F 454 °C		-
4CP4FRT-45-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	45 psig	850 °F 454 °C		-
4CP4FRT-40-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	40 psig	850 °F 454 °C		-
4CP4FRT-70-316	316 SS	Female BSPT	1/4 in	Female BSPT	1/4 in	0.35	FKM	70 psig	850 °F 454 °C		-
4CP4MRT-1/3-316	316 SS	Male BSPT	1/4 in	Male BSPT	1/4 in	0.35	FKM	1/3 psig	850 °F 454 °C		-
4CP4MRT-100-316	316 SS	Male BSPT	1/4 in	Male BSPT	1/4 in	0.35	FKM	100 psig	850 °F 454 °C		-
4CP4MRT-10-316	316 SS	Male BSPT	1/4 in	Male BSPT	1/4 in	0.35	FKM	10 psig	850 °F 454 °C		-
4CP4MRT-1-316	316 SS	Male BSPT	1/4 in	Male BSPT	1/4 in	0.35	FKM	1 psig	850 °F 454 °C		-