




# Rising Plug and Gauge Valves

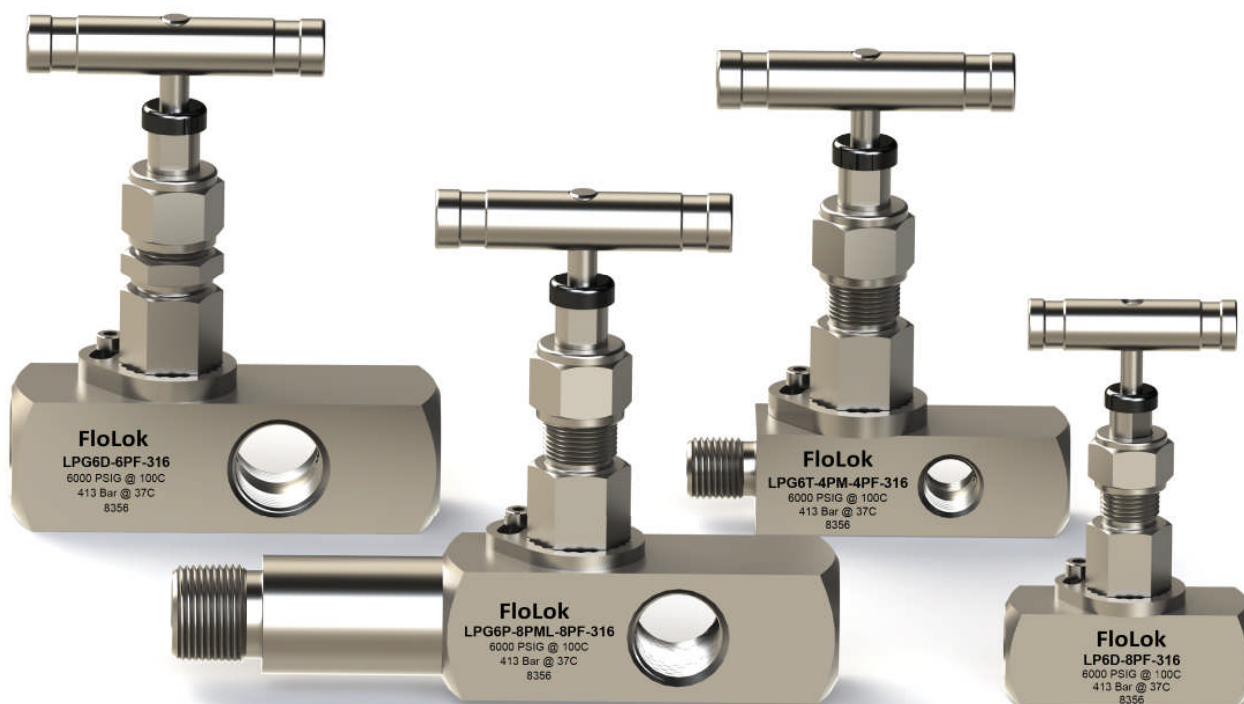

## FloLok® LP Series

- ✓ Pressure: Up to 6000 psig (413 bar)
- ✓ Temperature: -65 to 600° F (-53 to 315° C)

- ✓ Locked bonnet eliminates accidental disassembly of the bonnet
- ✓ Live-loaded packing reduces the need for packing adjustments



At SSP, we are proud to be an American manufacturing success story.

**100% of our products are made in America.** All of our manufacturing is performed in our 165,000 sq. ft. facility located near Cleveland, Ohio. Our facility is the largest vertically integrated, single-site operation in the industry. In addition to manufacturing and assembly, we have closed die forging, tool & die design, product engineering and testing operations under the same roof with customer service and management.

**Made in America is good business.** Not only do we make everything in America, we use American suppliers too. Buying American allows us to have better quality control and a more reliable supply chain. We can work more closely within our walls and with our suppliers to improve quality, reduce costs, and shorten lead times, which means faster service and better products for you.

**SSP** Industry Standard Products.  
*Made Better.*

## TABLE of CONTENTS

Introduction .....	3
Product Design .....	4
Materials of Construction .....	5
Temperature and Pressure Ratings .....	5
Ordering Information .....	6

## Part Numbers and Dimensions

Rising Plug .....	7
Gauge .....	8
Options & Accessories.....	9
Special Order Instructions .....	10
Safety, Testing, Warranty .....	10

# LP Series Rising Plug and Gauge Valves

## **Better Rising Plug and Gauge Valves**

LP Series rising plug and gauge valves use a unique combination of features that can reduce maintenance time and cost, improve safety and increase the reliability of instruments in your systems.

## **Locked Bonnet Design for Greater Safety**


The LP Series valve takes the best aspects of union bonnet and screwed bonnet designs to provide safer and more reliable service. LP Series' bonnets incorporate the stem, packing nut, packing bolt and packing into a single assembly. The bonnet is screwed into the valve body, then locked in place with a lock ring. This design prevents accidental disassembly from over-rotating the handle past fully open or from loosening due to vibration. The back seating plug allows inline packing adjustments to be made more safely.

## **Live loaded Chevron Packing for Greater Reliability**


The tighter your system, the better your data. LP Series valves are designed with live loaded packing that provides a dynamic leak-tight stem seal, which compensates for changes in pressure, temperature and packing wear.

## **Severe Service Construction**

LP Series rising plug and gauge valves are built for demanding conditions. In addition to the bonnet construction, LP Series valves feature a non-rotating lower stem that prevents seat damage and reduces wear to the seat and packing. The threaded upper stem and stem pivot are located above the packing to prevent system media from attacking the threads or from washing away thread lubricants. A dust cap prevents dust and other environmental elements from contaminating the threads.

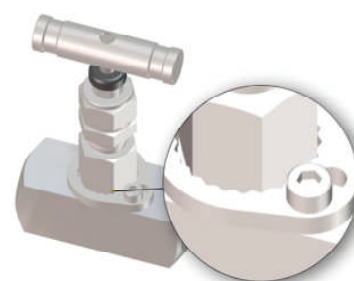


LP Series Locked Bonnet Design



# Product Design

*Meets ASME B31.1 and B31.3 design pressure calculations*

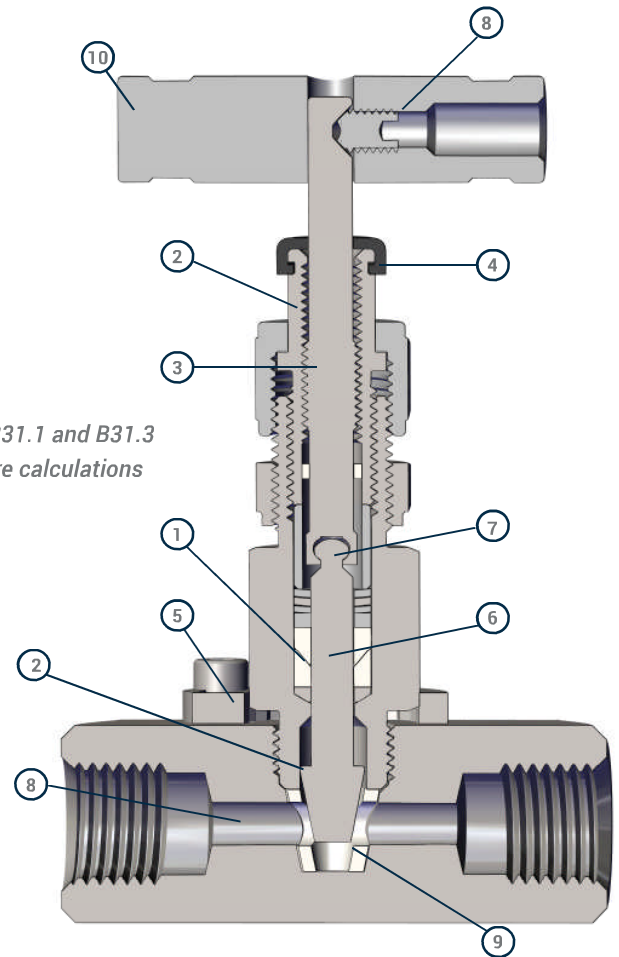

## 1 LIVE LOADED CHEVRON PACKING

- Reduces need for packing adjustments
- Compensates for wear
- Compensates for pressure and temperature changes
- Packing support prevents extrusion of the packing
- Easy actuation with positive shutoff
- Stem will not back out in high-vibration applications

## 2 BACK SEATING STEM ALLOWS FOR INLINE PACKING ADJUSTMENT

- Isolates the packing when the valve is in the fully open position
- Makes packing adjustment safer

## 3 HARDENED NON-WETTED STEM THREADS

- Hardened 17-4 PH stainless steel
- High cycle life
- Retains lubricants for easy operation and longer cycle life

## 4 DUST CAP

- Prevents contamination of the stem threads from the environment

## 5 BONNET LOCK PLATE

- Locks bonnet in place to prevent accidental disassembly

## 6 NON-ROTATING LOWER STEM

- Prevents damage to the seat and stem tip for repetitive leak-tight sealing even in severe environments
- Reduces packing maintenance because the stem does not rotate within the packing
- Chrome-plated, strain-hardened 316 SS

## 7 NON-WETTED STEM PIVOT INTERLOCK

- Prevents system media from infiltrating and seizing up the stem joint

## 8 STRAIGHT FLOW PATH

- High Flow
- Roddable

## 9 REPLACEABLE SEAT


- Three material choices (Acetal/PFA/PEEK)

## 10 DURABLE STAINLESS STEEL HANDLE

# Materials of Construction

ID	COMPONENT	MATERIAL	SPECIFICATION
1	Handle Screw	316 SS	A276
2	T-Bar Handle	303	A582
3	Dust Cap	NBR	D2000
4	Packing Nut	316 SS	A276
5	Packing Bolt	316 SS	A276
6	Stem Guide	PEEK	
7	Upper Stem	17-4PH	A564
8	Packing Spacer	316 SS	A276
9	Packing Springs	301	A666
10	Packing Washer	316 SS	A276
11*	Upper Packing	PTFE / PEEK	D1710
12*	Lower Packing	PTFE / PEEK	D1710
13*	Packing Support	316 SS	A176
14*	Lower Stem	316 SS / Alloy 405	A276
15	Panel Nut (Optional)	316 SS	A176
16*	Bonnet	316 SS / Alloy 400	A479
17*	Seat Pin	316 SS	A276
18*	Seat	Acetal / PFA / PEEK	
19	Set Screw	316 SS	A276
20	Bonnet Lock	316 SS	A276
21*	Body	316 SS / Alloy 400	A479
	Thread Lubricant	Christo-Lube MCG 130	
	Packing Lubricant	Christo-Lube MCG 111	

\*Wetted components

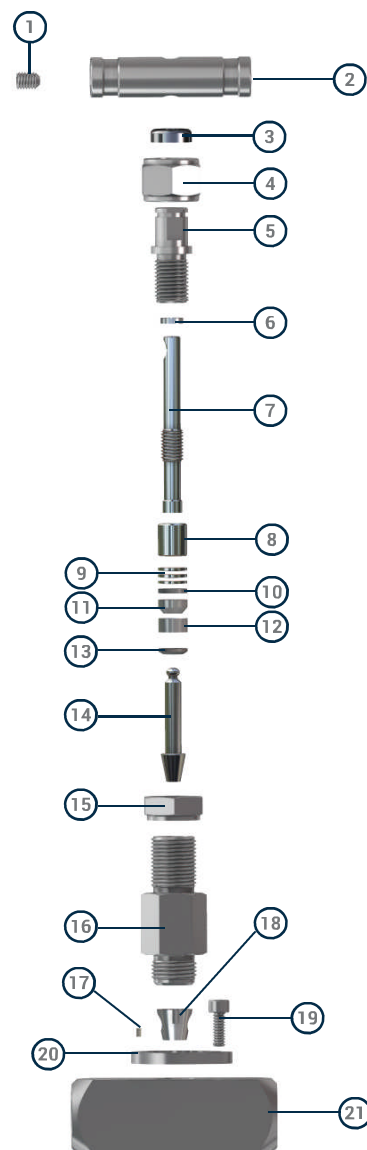

## Temperature Pressure Tables

SERIES	SS 316			ALLOY 400		
Seat Material	Acetal	PEEK	PFA	Acetal	PEEK	PFA
Temperature	Working Pressure - psig (bar)					
-65 to 100°F (-53 to 37°C)	6000 (413)	6000 (413)	750 (51.6)	5000 (344)	5000 (344)	750 (51.6)
200°F (93°C)	2650 (182)	3000 (206)	625 (43.0)	2650 (182)	3000 (206)	625 (43.0)
250°F (121°C)	1000 (68.9)	1600 (110)	450 (31.0)	1000 (68.9)	1600 (110)	450 (31.0)
300°F (148°C)	-	1300 (89.5)	300 (20.6)	-	1300 (89.5)	300 (20.6)
350°F (176°C)	-	1200 (82.6)	200 (13.7)	-	1200 (82.6)	200 (13.7)
400°F (204°C)	-	1000 (68.9)	100 (6.8)	-	1000 (68.9)	100 (6.8)
500°F (260°C)	-	600 (41.3)	-	-	600 (41.3)	-
600°F (315°C)	-	200 (13.7)	-	-	-	-

# Ordering Information

*Ordering LP Series valves requires the following steps:*

- 1 Locate the part number with the required body size, orifice size, and end connection type(s) and size(s).  
(see pages 07-08)

Example: **LP6-4PF** Rising Plug Valve

Example: **LPG6-4PF** Gauge Valve

- 2 Add the required Seat Material Designator (see page 09). Example LP6**D**-4PF


- 3 Add the Body Material Designator (see page 09). Example: LP6D-4PF-**316**

- 4 Add designators for Options (see page 09).

**NOTE:** For configurations that are not in the catalog, see the Special Order instructions on page 10.

# Basic Part Numbers and Dimensions

## Rising Plug Valves

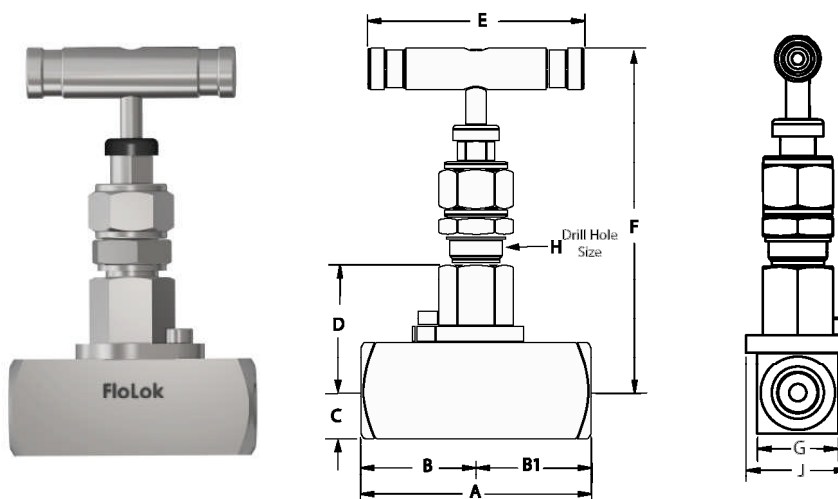


END CONNECTION			BASIC PART NUMBER	ORIFICE IN. (MM)	CV	DIMENSIONS IN. (MM)									
TYPE	INLET SIZE	OUTLET SIZE				A	B	B1	C	D	E	F	G	H	J
Female NPT	1/4	1/4	LP6-4PF	0.187 (3.96)	0.85	2.24 (56.9)	1.12 (28.5)	1.12 (28.5)	0.44 (11.2)	1.35 (34.3)	2.50 (63.5)	3.85 (97.8)	0.88 (22.2)	11/16 or 23/32	1.10 (27.9) <sup>1</sup>
	1/2	1/2	LP6-8PF	0.250 (6.35)	1.65	2.66 (67.6)	1.33 (33.8)	1.33 (33.8)	0.56 (14.2)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.13 (28.6)	11/16 or 23/32	1.10 (27.9)
Male to Female NPT	1/4	1/4	LP6-4PM- 4PF	0.187 (3.96)	0.85	2.9 (73.7)	1.78 (45.2)	1.12 (28.5)	0.44 (11.2)	1.35 (34.3)	2.50 (63.5)	3.85 (97.8)	0.88 (22.2)	11/16 or 23/32	1.10 (27.9) <sup>1</sup>
	1/2	1/4	LP6-8PM- 4PF	0.187 (3.96)	0.85	3.07 (76.5)	1.50 (38.1)	1.51 (38.4)	0.44 (11.2)	1.35 (34.3)	2.50 (63.5)	3.85 (97.8)	0.88 (22.2)	11/16 or 23/32	1.10 (27.9) <sup>1</sup>
	1/2	1/2	LP6-8PM- 8PF	0.250 (6.35)	1.65	3.48 (88.6)	2.15 (54.6)	1.33 (33.8)	0.56 (14.2)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.13 (28.6)	11/16 or 23/32	1.10 (27.9)
	3/4	1/2	LP6-12PM- 8PF	0.250 (6.35)	1.65	3.50 (88.9)	1.75 (44.5)	1.75 (44.5)	0.56 (14.2)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.13 (28.6)	11/16 or 23/32	1.10 (27.9)

<sup>1</sup> Bonnet lock ring is wider than the body

# Basic Part Numbers and Dimensions

## Rising Plug Gauge Valves

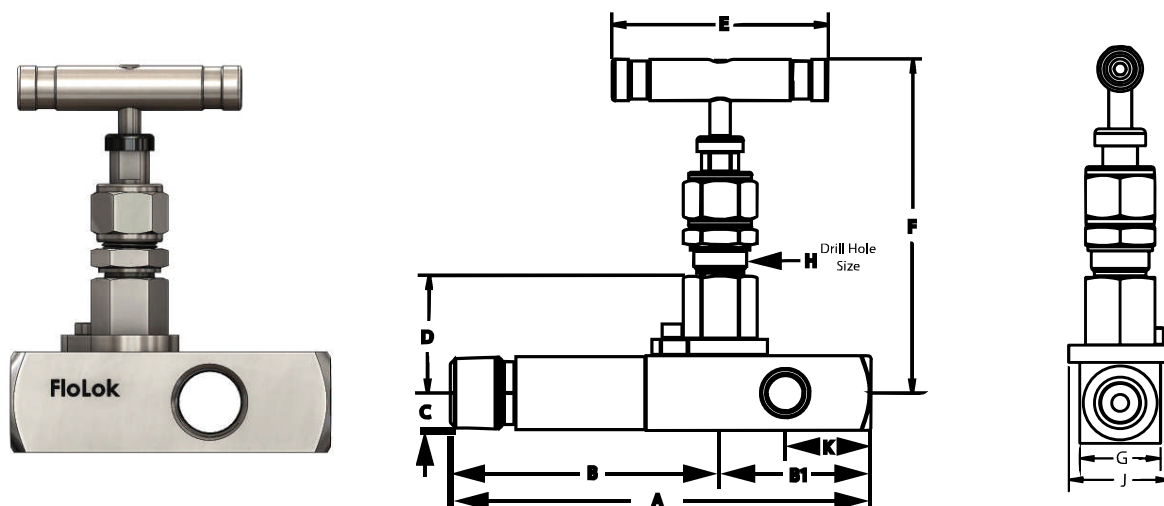

END CONNECTION			BASIC PART NUMBER	ORIFICE IN. (MM)	CV	GAUGE PORT SIZES <sup>2</sup>	DIMENSIONS IN. (MM)									
TYPE	INLET SIZE	OUTLET SIZE					A	B	B1	C	D	E	F	G	H	J
Rising Plug Gauge Valves																
Female NPT	1/4	1/4	LPG6-4PF	0.187 (3.96)	0.85	1/4	2.87 (72.9)	1.12 (28.5)	1.75 (44.5)	0.44 (11.2)	1.35 (34.3)	2.50 (63.5)	3.85 (97.8)	0.88 (22.2)	11/16 or 23/32	1.10 (27.9) <sup>1</sup>
	1/2	1/2	LPG6-8PF	0.250 (6.35)	1.65	1/2	3.58 (90.9)	1.48 (37.6)	2.10 (51.1)	0.63 (16.8)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.25 (31.8)	11/16 or 23/32	1.10 (27.9)
	1/2	1/2	LPG6-8PF- 8PF-4PF	0.250 (6.35)	1.65	1/4	3.58 (90.9)	1.48 (37.6)	2.10 (51.1)	0.56 (14.2)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.13 (28.6)	11/16 or 23/32	1.10 (27.9)
Male to Female NPT	1/2	1/4	LPG6-8PM- 4PF	0.187 (3.96)	0.85	1/4	3.50 (88.9)	1.75 (44.4)	1.75 (44.5)	0.44 (11.2)	1.35 (34.3)	2.50 (63.5)	3.85 (97.8)	0.88 (22.2)	11/16 or 23/32	1.10 (27.9) <sup>1</sup>
	1/2	1/2	LPG6-8PM- 8PF	0.250 (6.35)	1.65	1/2	4.41 (112.0)	2.16 (54.9)	2.25 (57.2)	0.63 (16.8)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.25 (31.8)	11/16 or 23/32	1.10 (27.9)
Rising Plug Gauge Valves with Extended Inlets																
Male to Female NPT	1/2	1/4	LPG6-8PML- 4PF	0.187 (3.96)	0.85	1/4	4.87 (123.7)	3.12 (79.2)	1.75 (44.5)	0.44 (11.2)	1.35 (34.3)	2.50 (63.5)	3.85 (97.8)	1.25 (31.8)	11/16 or 23/32	1.10 (27.9)
	1/2	1/2	LPG6-8PML- 8PF	0.250 (6.35)	1.65	1/2	5.58 (141.7)	3.33 (84.6)	2.25 (57.2)	0.63 (16.8)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.25 (31.8)	11/16 or 23/32	1.10 (27.9)
	3/4	1/2	LPG6-12PML- 8PF	0.250 (6.35)	1.65	1/2	5.58 (141.7)	3.33 (84.6)	2.25 (57.2)	0.56 (14.2)	1.46 (37.1)	2.50 (63.5)	3.95 (100.3)	1.25 (31.8)	11/16 or 23/32	1.10 (27.9)

<sup>1</sup> Bonnet lock ring is wider than the body

<sup>2</sup> To order other gauge port sizes, see instructions on page 10



# Options & Accessories

## Extended Inlet

Extended Male NPT inlets for use with pipe insulation are available. Basic Part Numbers for standard valves are available in the Part Number and Dimensions table on pages 07 and 08. For special order valves with extended inlets (2.26 IN. extension), add an "L" to the inlet designator.

Example: LP6D-8PML-8PF-316

## Seat Material

Select the seat material designator from the table below then insert it into the basic part number following the series designator.

Examples: LP6D-8PF-316 Acetal Seat

LP6P-8PF-316 PEEK Seat

STEM TYPE	DESIGNATOR
Acetal	D
PFA	T
PEEK	P

## Body Material


Select the valve body material required and add the designator to the valve basic part number after the end connection designators.

Example: LP6-8PF-M

MATERIAL	DESIGNATOR
316 Stainless Steel	-316
Alloy 400	-M

## Bleed & Purge Valves

SSP offers bleed and purge valves for installation in LP Series Gauge Valves. For more information, go to [www.mySSPusa.com](http://www.mySSPusa.com) or contact your authorized SSP distributor.

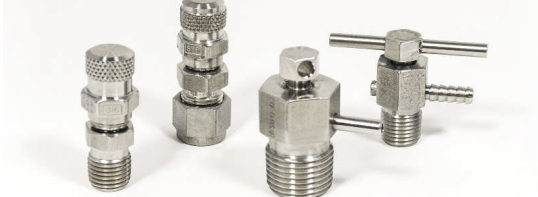

## Rebuild Kits

Seat and bonnet rebuild kits are available. Bonnet kits are preassembled and ready to install in the valve body. Seat kits include the seat and seat pin used to align and secure the seat in the valve body. To order rebuild kits, contact your authorized SSP distributor or SSP Customer Service.

## Replacement Handles and Dust Caps

To order replacement handles and dust caps, use the part number from the table below.

VALVE SERIES	T-BAR	DUST CAP
LP6	L6-7A-303	L6-3C-NBR

## Sour Gas Service

LP Series rising plug valves constructed with materials selected in accordance with NACE MR0175/ ISO 15156 are available for sour gas service.

To order add -SG to the part number.

Example: LP6D-4PF-4PM-316-SG

## Panel Mounting

To order panel nuts to mount LP Series valves on bulkheads, panels and cabinets use part number L6-6A-316.

## Special Cleaning

LP Series valves are available with ASTM G93 Level C compliant cleaning. When used in Oxygen enriched environment the valve is derated to 500 psig (34.4 bar). To specify special cleaning, add -XP98 to the part number.

Example: LP6D-8PF-316-XP98

For more information about special cleaning, please contact your local SSP distributor or SSP Customer Service.

# Special Orders

The Basic Part Numbers and Dimensions tables (pages 7 and 8) contain only the most popular valve configurations; many more are available. If the required valve configuration is not in the Basic Part Numbers and Dimensions tables, use the chart below to build part numbers for quotation purposes.

(basic part number)			(options)		
<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>
LP6	D	-8PM -8PF	-4PF	-316	-SG

**A**

**SERIES / SIZE**

LP6 *Rising Plug*  
LPG6 *Gauge*

**B**

**SEAT MATERIAL**

D *Acetal*  
T *PFA*  
P *PEEK*

**E**

**BODY MATERIAL**

-316 *316 Stainless Steel*  
-M *Alloy 400*

**C**

+

**D**

**INLET<sup>2</sup> + OUTLET<sup>2</sup> / PORT<sup>3</sup> SIZE- TYPES**

		<b>Fractional Sizes:</b>
<b>*PF</b>	<i>Female NPT</i>	
<b>*PML</b>	<i>Male NPT Extended Inlet</i>	2 1/8 in.
<b>*PM</b>	<i>Male NPT</i>	4 1/4 in.
<b>*SW</b>	<i>Tube Socket Weld</i>	6 3/8 in.
<b>*PSW</b>	<i>Pipe Socket Weld</i>	8 1/2 in.
<i>* To designate a connection size and type, replace the "*" with the fractional size designator. Example: 4PML</i>		12 3/4 in.
		16 1 in.

**F**

**OPTIONS<sup>1</sup>**

**SOUR GAS**

-SG *NACE MR01-75 / ISO 15156*

**SPECIAL CLEANING**

-XP98 *Oxygen compatible lubricant, per ASTM G93, Level C and CGA G-4.1*

**Important Information**

**!** IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE PERSONAL INJURY AND PROPERTY DAMAGE. It is the sole responsibility of the system designers and users to properly select and use products for their specific applications. This document has been provided to users with technical expertise as a reference for further investigation to determine specific product needs relative to their design requirements.

**!** Packing must be adjusted for applications with working pressure higher than 1000 psig (69 bar) or if the valves have been exposed to high or low temperatures prior to installation. Instructions for packing adjustments are included with each valve.


Valves that have not been actuated for extended periods of time may require greater actuation torque.

## Testing

All LP Series valves are factory tested with Nitrogen to 1000 psig (69 bar) at 70°F (20°C). **Note: Packing adjustments may be required for applications with higher pressures and/or higher or lower process or environmental temperatures.**

## Warranty

FloLok valves are backed by the SSP Limited Lifetime Limited Warranty. This warranty is available from your local distributor or at [www.mySSPusa.com](http://www.mySSPusa.com).

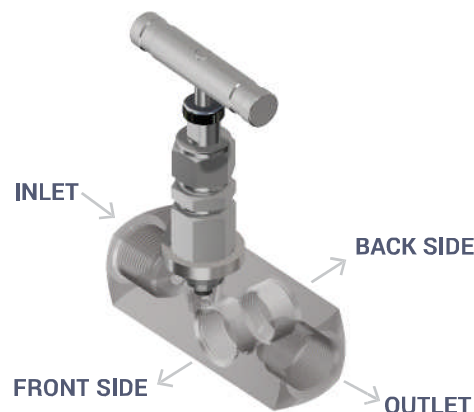

- <sup>1</sup> Add options designators to the end of the Base Part Number in alphabetical order.
- <sup>2</sup> If both ends match, use only one end connection designator. Example: LP6D-8PF-316  
If the ends do not match, designate the inlet then the outlet. Example: LP6D-8PM-8PF-316
- <sup>3</sup> Gauge ports are 1/4 or 1/2 in. female NPT only. If the gauge port size matches the outlet size, no designator is necessary. To order gauge port sizes that do not match the outlet size add the designator according to the table diagram below. Example: LP6D-8PM-8PF-4PF-4PF-316 for 1/2 in. female NPT outlet with 1/4 in. female NPT gauge ports.

# More SSP Products



## Tube Fittings

Duolok and Griplok two-ferrule and Unilok® single ferrule tube fittings provide leak-tight installation even when intermixed with Swagelok®, Hoke Gyrolok® and Parker CPI™ fittings.



## Valves

The FloLok valve offering includes ball, check, metering, needle, toggle, plug, bleed, and purge valves for pressures up to 10,000 psig.



## Tubing

SSP offers straight and coiled seamless 316 stainless steel instrumentation tubing for instrumentation, process and utility applications.



## Pipe Fittings

TruFit and TruFit 10K pipe fittings are available in a wide range of weld, threaded and flared connections.



## Filters

FloLok in-line and tee-type filters trap particles to clean sample fluids and protect sensitive process and analytical instrumentation components and equipment.



## Hose

TruFit PTFE-lined and flexible metal core hose assemblies are used in a variety of instrumentation, utility, biopharm and other applications.



## Tools & Accessories

SSP TurnPro professional hand tools, power tools and installation training make quality tube system installation faster and easier.



## Quick Connects

SSP offers single-end shutoff, double-end shutoff, and full-flow quick connects for instrumentation and process applications.



Founded 1926 • Privately owned, third generation family business • Modern manufacturing facility –  
165,000 square feet • Captive closed die forging operation • Integrated tool & die production  
Nearly 200 machining centers • ISO 17025 testing laboratory • Automated warehouse retrieval system  
ISO 9001 quality management system • \$20,000,000 product liability insurance policy • DFARS-com-  
pliant raw material • EN 10204 3.1 certification • Limited Lifetime Warranty • ASME B31.3 design  
Canadian Registration Number OA98665 • Third Party Approvals from CSA, TÜV, DNV, and ABS



8250 Boyle Parkway • Twinsburg, OH 44087  
330-425-4250 • [www.mySSPusa.com](http://www.mySSPusa.com)